

STOPPER CYLINDERS

SERIES ST

Single and double-acting, magnetic, non-rotating
Sizes 20, 32, 40, 50 mm



- In compliance with UNITOP and ISO 21287 standards
- Compact design
- Can be used with magnetic sensors
- Reliable and silent
- Non-rotating rod version
- Roller rod version
- Female threaded rod version
- High capacity to absorb kinetic energy of workpiece-holder pallets
- Mechanical end-stroke shock absorbers
- Sizing guide in catalog appendix

The Series ST Stopper cylinders are pneumatic actuators with rod, complying with UNITOP and ISO 21287 standards, where rod and bushing have been specifically enlarged to ensure high resistance to radial loads and shocks. These cylinders are available in two versions, double-acting and single-acting, and with rear spring. The non-rotating rod version is also available.

The detection of the piston position is enabled by means of proximity switches (Mod. CST or CSH) which are mounted in slots along three sides of the cylinder profile.

It is possible to cover the slots with a proper profile (Mod. S-CST-500).

The high resistance to shocks and radial loads and the easy mounting makes Series ST particularly suitable for use in transport/conveyor lines where it is required to stop the transit of workpieces and workpiece-holder pallets.

General Data

Construction	profile with self-tapping screws
Cylinder design	compact based on UNITOP and ISO 21287 standards
Operation	double-acting, single-acting rear spring, double-acting rear spring
Sizes	20, 32, 40 (Mod. ST32 only), 50 mm
Strokes min. max	5 ÷ 30 mm (see the table of standard strokes)
Rod versions	without thread, with female thread, non-rotating, non-rotating with female thread, non-rotating with roller
Non-rotating function	with technopolymer anti-friction ring
Fixing and mounting	direct with holes on the end-caps, in any position
Cushioning	mechanical end-stroke shock absorbers in rubber
Max frequency	5 Hz (Ø 20, 32, 40 mm) - 3 Hz (Ø 50 mm)
Working temperature	0°C ÷ 80°C (with dry air -20°C)
Storage temperature	-20°C ÷ 100°C
Working pressure	1 ÷ 10 bar (double-acting) - 2 ÷ 10 bar (single-acting)
Max rotation play	± 4° (Ø 20, 32 e 40 mm) - ± 3° (Ø 50 mm)
Max. torque (for non-rotating version)	1,5 Nm (Ø 20 mm) - 2,5 Nm (Ø 32 e 40 mm) - 3,5 Nm (Ø 50 mm)
Medium	filtered air in class 7.8.4 according to ISO 8573-1 standard
Lubrication	Not required. The cylinder is pre-lubricated. If lubricated air is used, it is recommended to use oil ISOVG32. Once applied the lubrication should never be interrupted.
Use with external sensors	slots on the three sides for proximity switches Mod. CST

STOPPER CYLINDERS
SERIES ST - STROKES

PNEUMATIC ACTUATION

1

STANDARD STROKES

✕ = Single-acting and double-acting


Mod.	Ø	10	15	20	25	30
ST31	20		✕			
ST31	32			✕		
ST31	50					✕
ST32	20	✕	✕			
ST32	32		✕	✕	✕	
ST32	40			✕	✕	✕
ST32	50			✕	✕	✕

Coding Examples

ST	31	2	A	050	A	030
ST	SERIES					
31	CONSTRUCTION STANDARD 31 = UNITOP 32 = ISO 21287					
2	OPERATION 2 = double-acting 4 = single-acting, rear spring 9 = double-acting, rear spring					PNEUMATIC SYMBOLS CD08 / CD25 / CD21 CS08 / CS19 / CS15 CS17 / CS20 / CS16
A	DESIGN A = standard R = non-rotating (for Mod. ST32 only)					
050	BORE 020 = 20 mm 032 = 32 mm 040 = 40 mm (for Mod. ST32 only) 050 = 50 mm					
A	CONSTRUCTION A = standard R = with roller (for non-rotating version only) F = with female thread (for Mod. ST32 only)					
030	STROKE (see the table)					
	ROD LENGTH VERSION = Standard (_ _ _) = extended piston rod _ _ _ mm					



PNEUMATIC SYMBOLS

The pneumatic symbols which have been indicated in the CODING EXAMPLE are shown below.

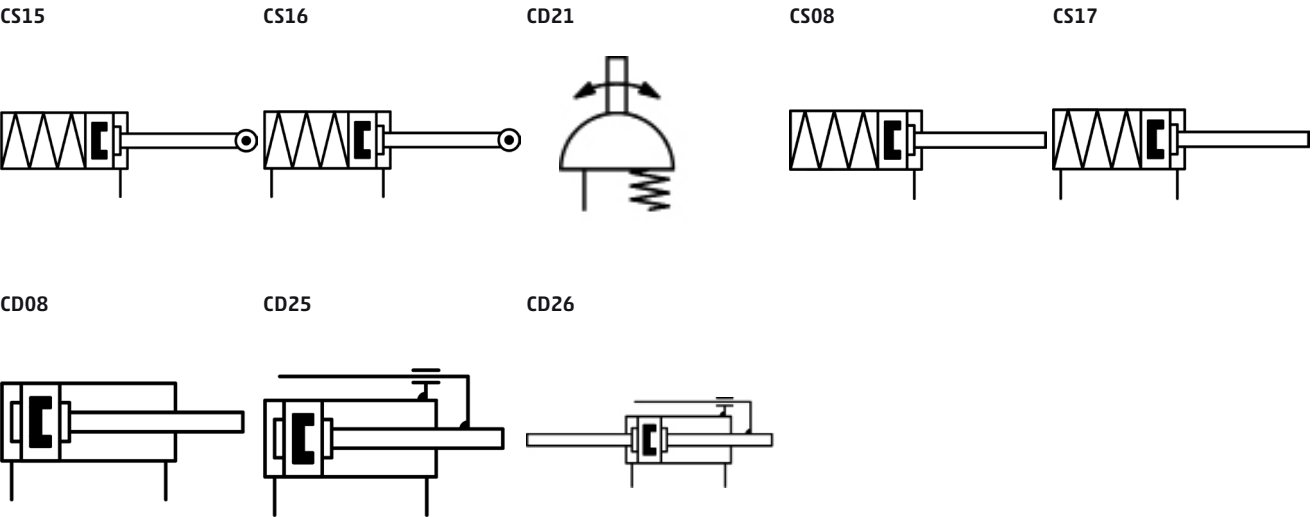

SERIES ST MATERIALS


Parts	Materials
1 - Rod	Stainless steel
2 - Profile	Anodized aluminium
3 - Head	Anodized aluminium
4 - Spring	Steel
5 - Piston seal	PU
6 - Magnet	Plastoferrite
7 - Rod seal	PU
8 - Rod guide bushing	Technopolymer
9 - Non-rotating ring	Technopolymer
10 - Roller	Stainless steel

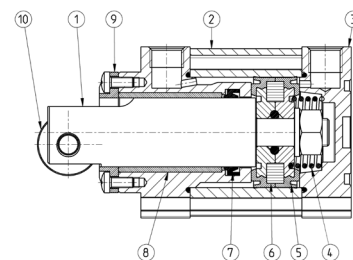


PNEUMATIC ACTUATION

1


EXAMPLES OF FIXING



Fixing from below



Fixing from above



IMPACT FORCE


Between the mass to stop and the stopper rod, an elastic bumper is assumed to be inserted, which is capable of absorbing the impact by deforming at least 1mm.

	20	32	40	50
ST	1320 (N)	3200 (N)	5500 (N)	6200 (N)
ST...R	820 (N)	2600 (N)	4450 (N)	5900 (N)

DIAGRAMS OF MASS / IMPACT SPEED


PNEUMATIC ACTUATION

1

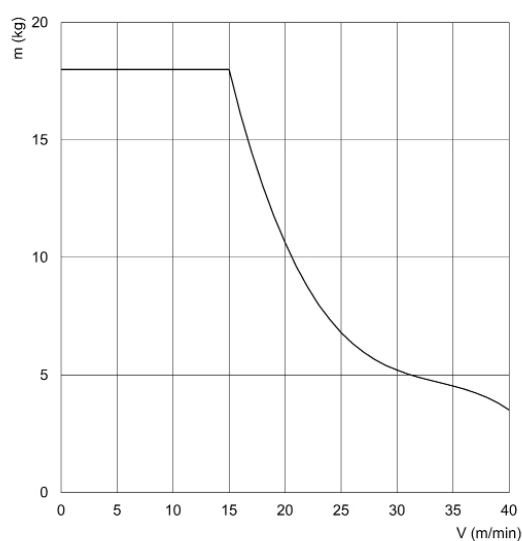


Cylinders Ø20 mm

m = mass (kg)
V = impact speed (m/min)

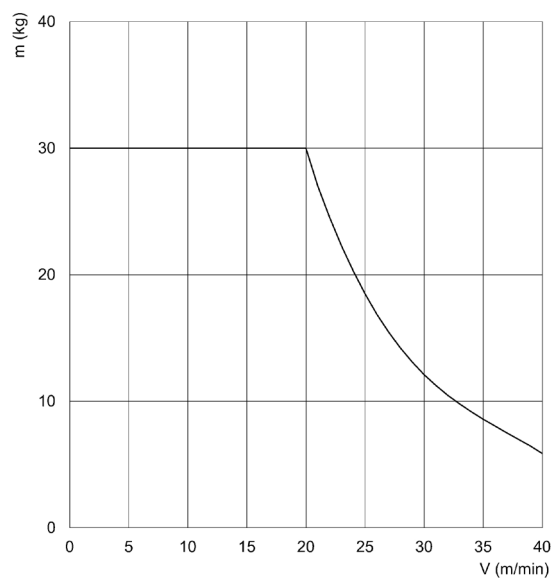


Cylinders Ø32 mm

m = mass (kg)
V = impact speed (m/min)

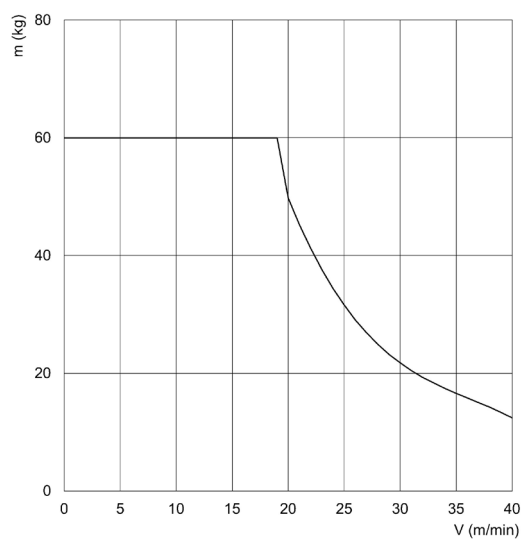


Cylinders Ø40 mm

m = mass (kg)
V = impact speed (m/min)

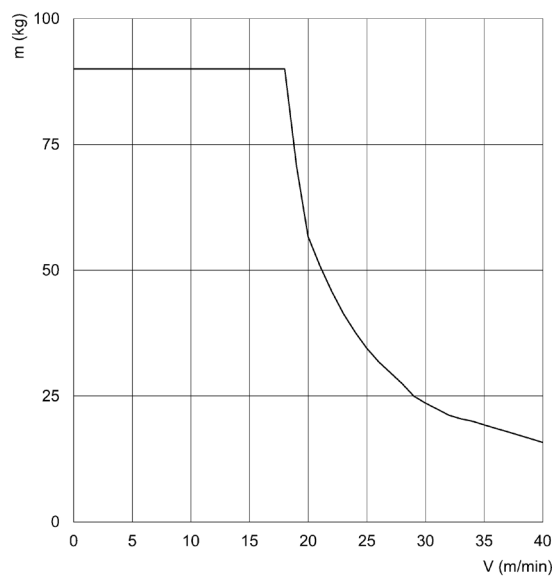


Cylinders Ø50 mm

m = mass (kg)
V = impact speed (m/min)

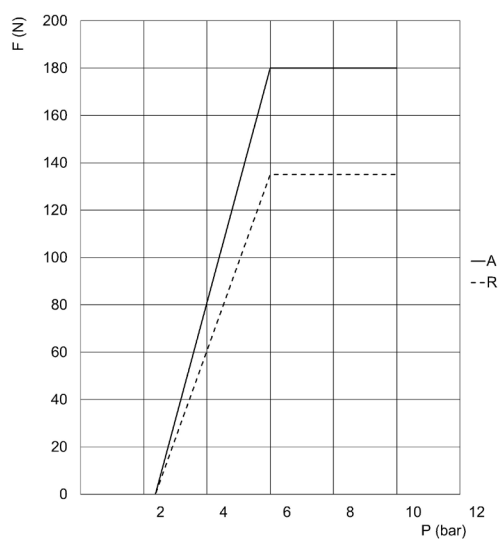DIAGRAMS OF APPLICABLE LATERAL FORCES DURING OPERATION


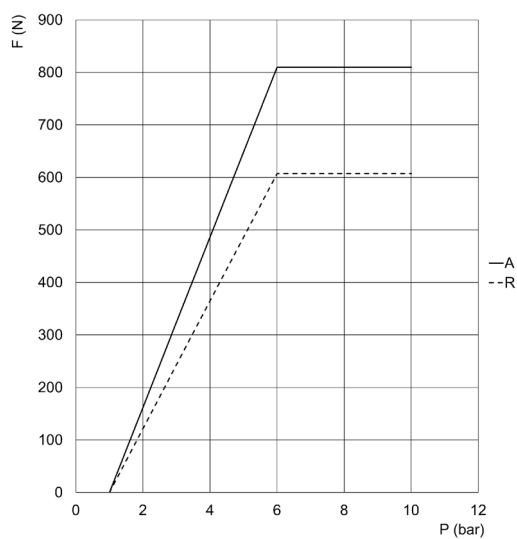
Cylinders Ø20 mm, standard (A) and non-rotating (R) version

P = Pressure (bar)
F = applicable lateral Force (N)

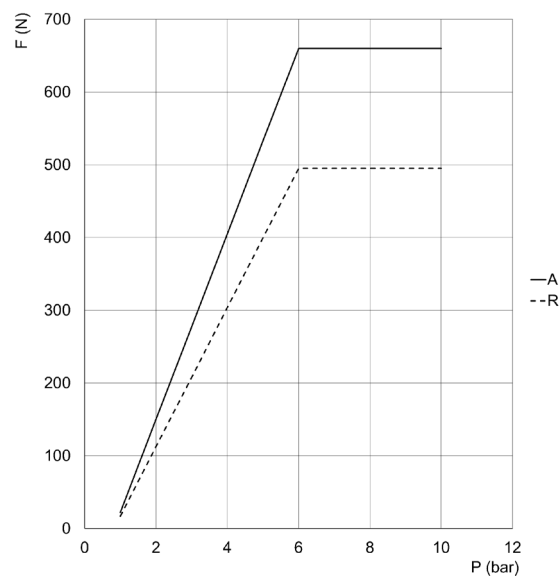


Cylinders Ø32 mm, standard (A) and non-rotating (R) version

P = Pressure (bar)
F = applicable lateral Force (N)



Cylinders Ø40 mm, standard (A) and non-rotating (R) version


P = Pressure (bar)
F = applicable lateral Force (N)

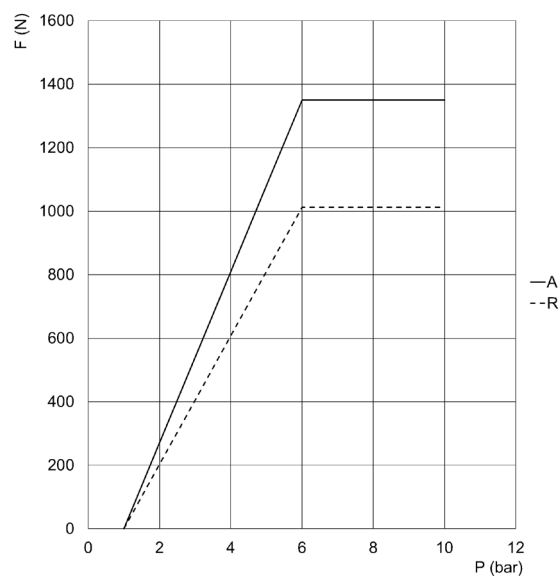

Cylinders Ø50 mm, standard (A) and non-rotating (R) version






P = Pressure (bar)
F = applicable lateral Force (N)

DIAGRAM OF THE SPRING FORCES ACCORDING TO THE CYLINDER STROKE

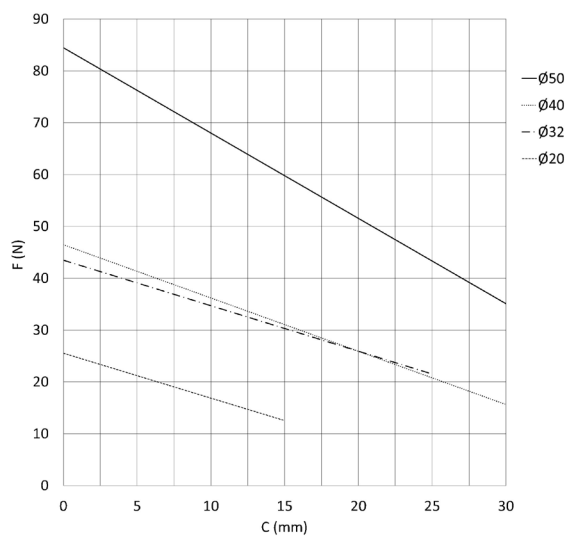


F = Force
C = Stroke

Stopper cylinders Mod. ST31 (UNITOP)





Ø	BG	G	ØD	ØD1	ØD4	ØD7	E	EE	E1	L	LA	L1	PL	RT	T2	TG	ZA	ZB
20	18,5	12	12	26	6	4	35,5	G1/8	M2	38	5	11,5	8	M5	4,5	22	38	49,5
32	21,5	14,5	20	38	6	5	50	G1/8	M3	52	5	16	8	M6	4,5	32	44,5	60,5
50	20	14,5	32	53	6	6	68	G1/8	M3	71	6	24	8	M8	4,5	50	45,5	69,5

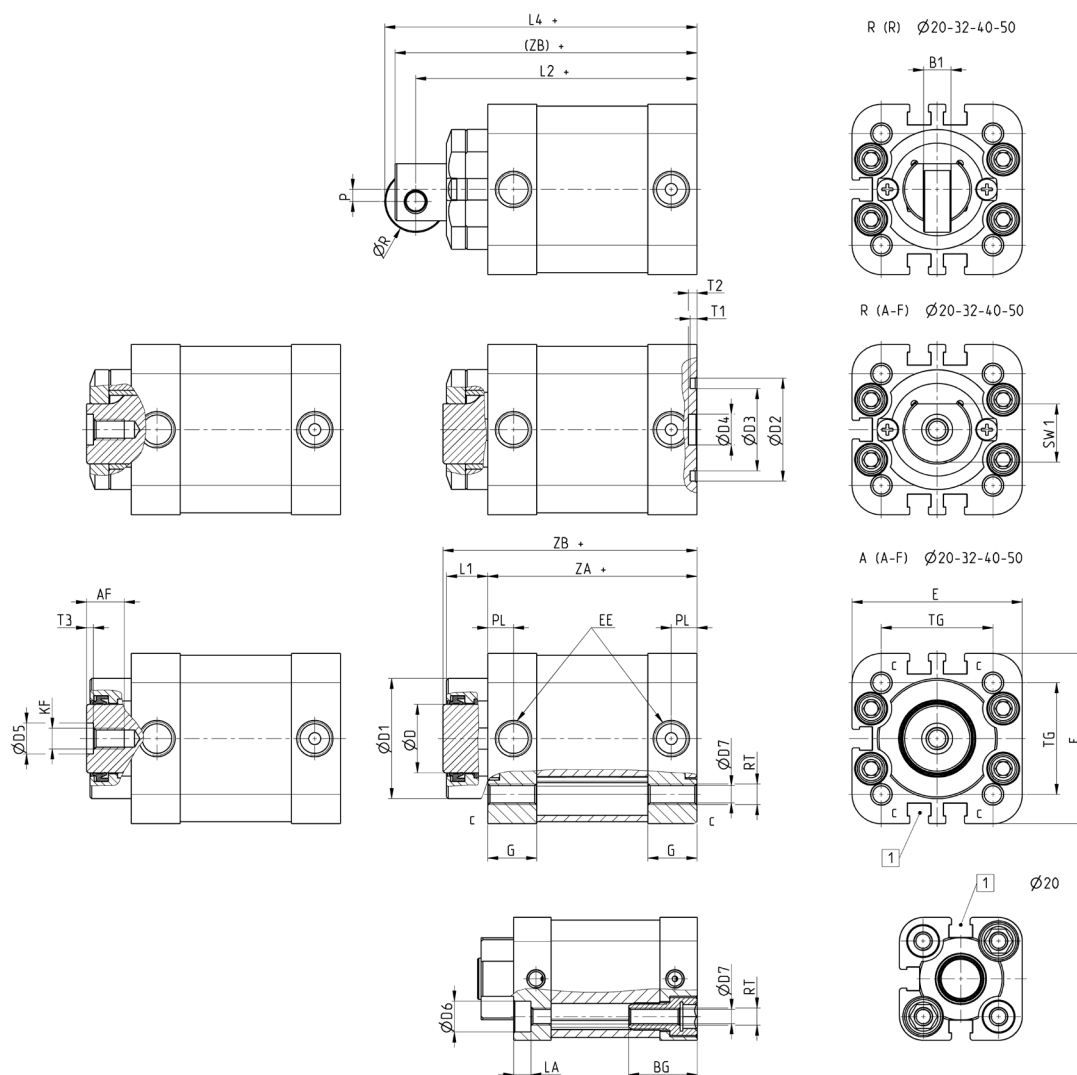Stopper cylinders Mod. ST32 (ISO 21287)


Ø	AF	BG	B1	G	ØD	ØD1	ØD2	ØD3	ØD4	ØD5	ØD6	ØD7	E	EE	KF	LA	L1	L2	L4	P	PL	ØR	RT	SW1	T1	T2	T3	TG	ZA	ZB
20	6	20	4	10,9	12	25	-	-	9	5	9	4	35,8	M5	M3	5	9,5	68	73	2	6,5	10	M5	10	-	2,5	1,2	22	53,5	64
32	11	-	8	14,3	20	35	30	24	9	9	-	5	49,6	G1/8	M6	-	12	82	91	3,5	7,6	18	M6	17,5	2	2,5	2	32,5	61	74
40	14,5	-	8	14,3	25	43	35	29	12	12	-	5	57	G1/8	M8	-	12,5	90	101	5	7,6	22	M6	22	2	2,5	2,5	38	66,5	80
50	14,5	-	10	14,3	32	51	40	34	12	12	-	6	69,6	G1/8	M8	-	14,5	92,5	105	7	7,6	25	M8	28	2	3	2,5	46,5	65,5	81

Magnetic proximity switches with 2 or 3 wire cable for T-slot

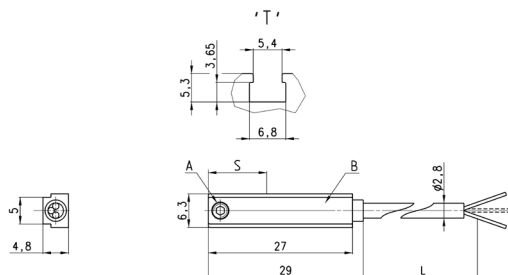


A = Fixing screw
B = Led indicator
S = Sensing point
L = Length cable

Mod.	Operation	Connections	Voltage	Output	Max. current	Max Load	Protection	L	S	LED colour
CST-220*	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8W	None	2 m	14,5 mm	Yellow
CST-220-5*	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	5 m	14,5 mm	Yellow
CST-220EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8W	None	2 m	14,5 mm	Yellow
CST-220-5EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8W	None	5 m	14,5 mm	Yellow
CST-220-12EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8W	None	12 m	14,5 mm	Yellow
CST-232	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	2 m	14,5 mm	Yellow
CST-232-5	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	5 m	14,5 mm	Yellow
CST-232EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8W	Against polarity reversing	2 m	14,5 mm	Yellow
CST-232-5EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8W	Against polarity reversing and overvoltage	5 m	14,5 mm	Yellow
CST-332	Magnetoresistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m	7,5 mm	Yellow
CST-332-5	Magnetoresistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m	7,5 mm	Yellow
CST-332EX	Magnetoresistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m	7,5 mm	Yellow
CST-332-5EX	Magnetoresistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m	7,5 mm	Yellow
CST-432	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	2 m	14,5 mm	Yellow
CST-432-5	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	5 m	14,5 mm	Yellow
CST-432EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	2 m	14,5 mm	Yellow
CST-432-5EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	5 m	14,5 mm	Yellow
CST-532	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m	8,5 mm	Yellow
CST-532-5	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m	8,5 mm	Yellow
CST-532EX	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m	8,5 mm	Yellow
CST-532-5EX	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m	8,5 mm	Yellow

*Mod. CST-220, CST-220-5:
in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.

Magnetic proximity switches with M8 3-pin connector for T-slot

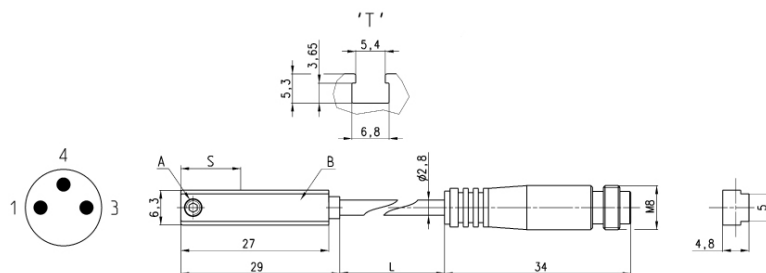

A = Fixing screw
B = Led indicator
S = Sensing point
L = Length cable

Mod.	Operation	Connection	Voltage	Output	Max. current	Max Load	Protection	L	S	LED colour
CST-250N*	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None	0,3 m	14,5 mm	Yellow
CST-250NEX	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None	0,3 m	14,5 mm	Yellow
CST-262	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	0,3 m	14,5 mm	Yellow
CST-262EX	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	0,3 m	14,5 mm	Yellow
CST-362	Magnetoresistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	0,3 m	7,5 mm	Yellow
CST-362EX	Magnetoresistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	0,3 m	7,5 mm	Yellow
CST-562	Hall effect	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	0,3 m	8,5 mm	Yellow
CST-562EX	Hall effect	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	0,3 m	8,5 mm	Yellow

*Mod. CST-250N:
in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.