

Compact, light-weight pneumatically-operated drilling units

SELFEEER ELECTRIC

SSE3

Standard type of SSE series.

Ideal for drilling in the

high-speed rotation range.

The ES3P type has been updated

by replacing the induction motor with a PM motor.



Energy
Saving

Global
Support

Variable
Rotation

Steel

φ 9

Aluminum

φ 13

Specifications


Supply air pressure at 0.5 MPa

Spec.	No-load rotation speed 50~120 Hz	Spindle Torque	Rated torque range	Chuck capacity	Drilling Capacity Per Number of Spindles												Stroke		Motor Specifications			Thrust	Air Consumption	Weight
					1-SP			2-SP			3-SP			4-SP			Total stroke	Cutting feed stroke	Rated Power	Rated Rotational Speed	Rated Current			
Model	min ⁻¹	N·m	min ⁻¹	mm	AL*	FC*	ST*	AL*	FC*	ST*	AL*	FC*	ST*	AL*	FC*	ST*	mm	mm	kW	min ⁻¹	A	N	L/Stroke	kg
SSE3-3090A	3,750	0.96	3,750	3	4	1.5	1.5	-	-	-	-	-	-	-	-	-	80	0-30	0.75	3000 (100Hz)	3.3	980	3-6	20
SSE3-3090LA	-9,000		-7,500	Keyless Chuck													150							23
SSE3-6065A	2,700	1.33	2,700	6.5	6	3	3	4.5	3	3	4	3	3	-	-	-	80							20
SSE3-6065LA	-6,480		-5,400														150							23
SSE3-1330A	1,250	2.87	1,250	13	9.5	6	5.5	7	5.5	5	6	5	3.5	5	4	2.5	80							20
SSE3-1330LA	-3,000		-2,500														150							23
SSE3-1312A (with gearbox)	500	7.14	500		13	10	9	8.5	6.5	5.5	6.5	5	4	5	4	3.5	80							21
SSE3-1312LA (with gearbox)	-1,200		-1,000														150							24

Notes:


- Model selection should be based on the shape of the work, material, cutting characteristics, diameter and material of tools, rotational speed (cutting speed), etc.
- The drilling capacity displayed in the above table is based on values representing a drilling depth of twice the diameter of the drill.
- The standard attachment for the Hydro Speed Regulator is RB-2430. Please specify an optional Hydro Speed Regulator if required.
(Optional Hydro Speed Regulator Models: RB-2460, R-2442A, R-2462A, R-2482A)
- Make sure to use a collet chuck or spindle nose when the hardness of carbide drills and tool shanks is higher than that of general HSS (high-speed steel) drills.
- Valveless specification is standard. If you require valve block specification [former standard specification], please order valve block ass'y separately. (Replacement to be made by customer)
- AL* : Aluminium(ADC12) FC* : Cast iron(FC200) ST* : Steel(S45C)

Dimensions (mm)



■Dimensions

	A	B	C	D	E	F	G	H
SSE3-3090A	80	520	79	441	149	24	14	JT1
SSE3-6065A		522	81			32	30	
SSE3-1330A		558	117	510		52.5	60	JT6
SSE3-1312A		627						
SSE3-3090LA	150	660	79	581	219	24	14	JT1
SSE3-6065LA		662	81			32	30	
SSE3-1330LA		698	117	650		52.5	60	JT6
SSE3-1312LA		767						

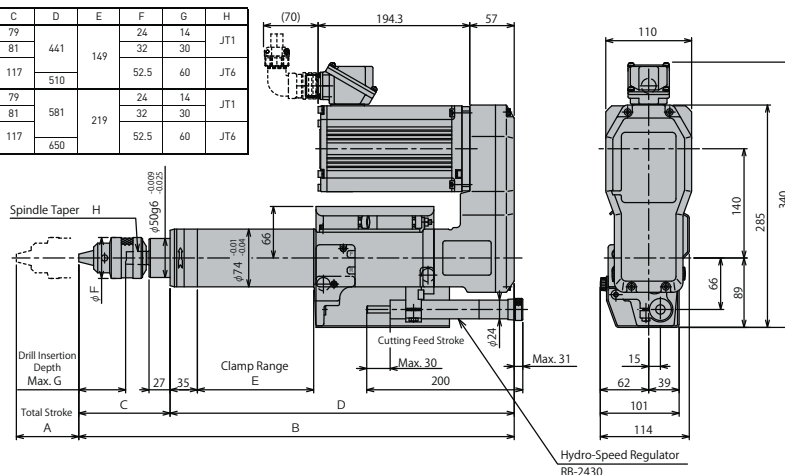

About Pneumatic Control Circuit

Please refer to the following QR code for the pneumatic control circuit to control the forward/reverse movement and speed of the Selfeer.


Notes

- Supply clean air of 0.5 to 0.6 MPa to the Selfeer.
- Air equipment up to the air supply port should be prepared by the customer.
- Use a meter-in flow control valve.
- When using the unit at an angle downward or vertical downward, install a pneumatic control circuit specialized to prevent them from falling.

For more info




Configuration diagram

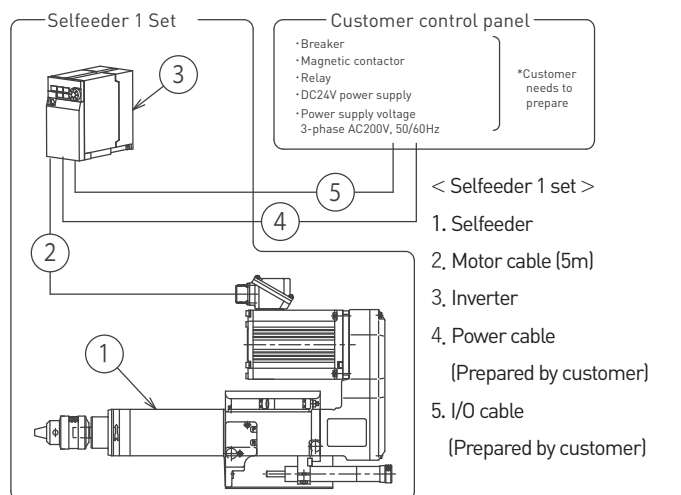


Inverter

FR-E820-0.75K

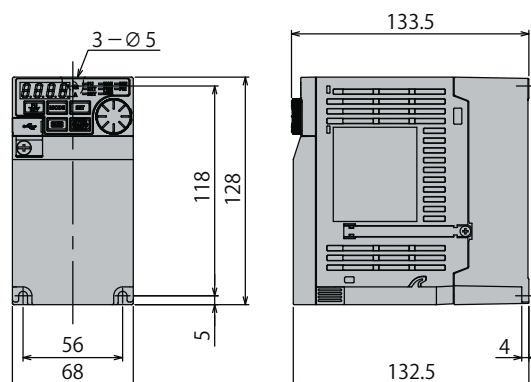

Tip shape


■ Collet chuck / spindle nose (option)
Model No.: ER20 or equivalent
(chucking range $\phi 1$ to $\phi 13$)



Note:

1. Detailed dimensions of spindle tip are as recommended for REGO-FIX ER collets.
2. Collet, collet nut, and wrench are not included. Please order separately.
3. When installing the Selfedre <Electric> horizontally, the drain outlet must face downwards.

■Adjustable Spindle Nose (option)
Model No.: KH-22E

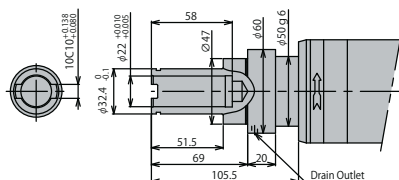

Note:

1. Detailed dimensions of spindle nose are as recommended by NT Tool Co.
2. KH-E type spindle nose is applicable to NT Tool's quick-change stub holders KH-A / KH-E type.
3. Adjustable spindle nose is not applicable for Selffeeder <Electric> with no-load rotation speed exceeding 5,000min⁻¹.
4. When installing the Selffeeder <Electric> horizontally, the drain outlet must face downwards.

I/O Signal Specifications

I/O	Signal	Name
Input	STF	Unused
	STR	Spindle ON
	RH	Multi-step spd (1 to 15 spd) Freq set range 50 to 120Hz Can be set in 5Hz increments
	RM	
	RL	
	MRS (REX)	
	RES	Reset
Output	A	Abnormal Output(Relay) Normally-open contact
	B	Abnormal Output(Relay) Normally-closed contact
	RUN	In operation
	FU	Freq detection

Options


■ Hydro-speed regulator

A hydraulic feed speed control unit that can adjust the feed rate of an air cylinder to any desired speed. For details, please refer to our web page.



■ Operate Signal Kit

This kit is designed to accurately detect the operation of a Selffeeder and control synchronized operation with other devices. For details, please refer to our web page.



■ **Multi-spindle head**

Various multi-spindle heads are available.
For details, please refer to our web page.



For more information about our products, please visit our website.▶▶



SUG!no
SUPER! TECHNOLOGY

SUGINO MACHINE LIMITED
www.sugino.com

Olinas Tower Bldg., 8th floor, 4-1-3 Taihei, Sumida-ku,
Tokyo, 130-0012 JAPAN
TEL +81-3-5619-5760 FAX +81-3-5619-5765
✉ export@sugino.com

- Specifications in this catalog are subject to change without prior notice for further improvement.
- When exporting this product overseas, please follow the export control procedures based on Japan's Foreign Exchange and Foreign Trade Law.
- **SUGINO**, **sugino**,  and **SELFFEEDER** are trademarks or service marks of Sugino Machine Limited in Japan or foreign countries.
- The content of this catalog is as of January 2024.
- Any unauthorized use, copying or reprinting of the contents or part thereof in this catalog is prohibited.